


FOLDING MACHINE . NOSO MX 211



Machine for folding the edge of a fabric to which a two-sided adhesive tape has already been applied. The machine is fitted with an additional heater with blade nozzle for guiding the fabric. The purpose of this machine is to eliminate the long fusion press step.




HEAT HAS NEVER BEEN SO GREEN
less consumption, better efficiency

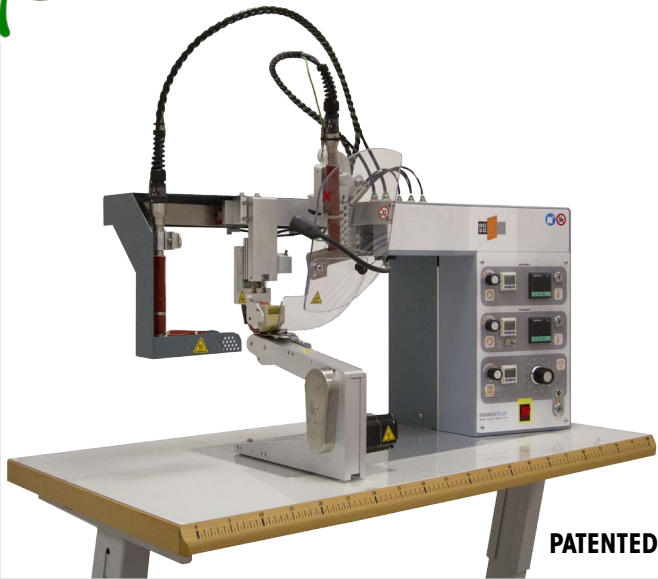

MACHINE KEY FEATURES

- Fold with constant widths both on straight and on curved sections
- No press step is necessary
- Even heat distribution
- Safeguards the most delicate fabrics
- No scorched fabrics
- Rubber conveyor belt
- High speed
- Top quality components
- Low and easy maintenance
- Tapes of different widths can be used
- Recommendable tape width:
6mm - 8mm - 10mm


TECHNOLOGY



LW 302. FOLDED EDGE

A first step is required with Weld&Cut machine MX 204.

APPLICATIONS



FRAMISITALIA

ISO BONDING TECHNOLOGY

FOLDING MACHINE . NOSO MX 211

TECHNICAL IMPROVEMENT

- .increase adhesion
- .increase speed
- .increase production
- .reduce thermal stress of the machine
- .reduce thermal stress on the fabric
- .minimize electricity consumption
- .greater performance with less quantity of air improving also the comfort for the operator
- .standby mode



HEAT HAS NEVER BEEN SO GREEN
less consumption, better efficiency



BASE MACHINE DESCRIPTION

- .Base machine with 2 heaters
- .spot lamp
- .drawer
- .Shaped rubber wheel 24/12 mm - 35SH (soft)
- .Heat conveyor 30 mm
- .30 mm nozzle
- .protection screen
- .Horizontal arm
- .white table with beach borders 120x60x4
- .table support structure
- .pedals
- .16A 3 poles socket
- .Folding guide 8 mm
- .Manual

TECHNICAL INFO FOR INSTALLATION

Dimension and weight

h. 1100 x 550 x H.1550 mm - 80 Kg

Pneumatic connection - all connections on the left side

Fast junction diam 8 mm

Maximum air flow: 100 l/min - average consumption: 45 to 55 l/min

Input air pressure: 5.5 bar (0,55 MPa)

Air quality: dry air in accordance to DIN 8573-1 with dew point + 3° C not lubricated

Electric connection

Nominal voltage: 230 Vac

Nominal frequency: 50 Hz / 60 Hz

Nominal power requirements: 2200 W

THE LOWEST CONSUMPTION IN THE WORLD OF BONDING

Average consumption for standard applications:

Electricity consumption: 0.55 kw/h - CO₂ emission: 170 gr/h - Compressed air consumption: 45 to 55 l/min

The machines complies to technical rulings: Machinery Directive 2006/42/CE, Electromagnetic Compatibility CEE 2004/108/CE and CEI EN 60204-1:2006, Low Tension Directive 2006/95/CE, UNI EN 414:2002, UNI EN ISO 12100:2010, UNI EN ISO 13857:2008, UNI EN ISO 13850:2007, UNI EN ISO 11202:2007

FRAMISITALIA
ITALY · HONG KONG · USA

FRAMIS ITALIA SpA . Via dell'Agricoltura 9/15 - 20083 Vigano di Gaggiano - Milan - Italy - www.framis.it

FRAMIS ITALIA HK . Ltd Unit G on 7/f - Kwai Shun Industrial Centre - No. 51-63 Container Port Road - Kwai Chung - New Territories - Hong Kong